



BLACK EPDM

Dektite Ezi-Seal is a super convenient

Easy to use black EPDM (Ethylene Propylene Diene Terpolymer, a highly durable synthetic rubber roofing membrane)

Non-absorbant, non-porous sponge gasket which seals by compression, even in wet conditions

The flashing hugs the roofline to provide a watertight seal without the need for the application of any silicone sealant.



A Perfect Seal For The Roof



Ideal for flashing pipes on metal roofs, this DEKTITE Premium is a multi-application flashing

A highly durable synthetic rubber roofing membrane, edged with a flexible aluminium band. It has a convenient square base that will fit any hole you've prepared on most roof profiles.





Suitable for a roof pitch between 0° and 45°, this robust EPDM flashing, which comes in either Black or Grey

Can be used with standard pipes where heat is not an issue, with constant temperatures of up to 115°C and intermittent temperatures up to 150°C. Additionally, it isn't corrugated, so you can easily mould the base into the required profile.

A highly durable synthetic rubber roofing membrane flashing solution

The large base of this grey EPDM (Ethylene Propylene Diene Terpolymer) flashing for metal roofs dramatically reduces and, as the name suggests, diverts rainwater pooling.

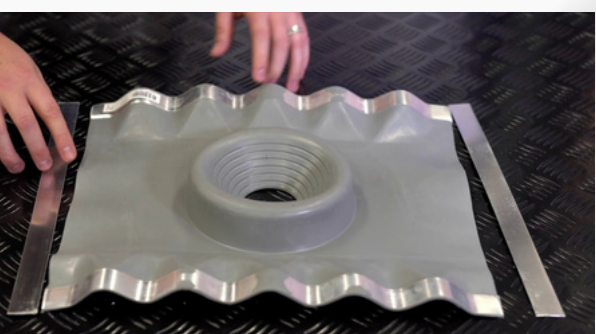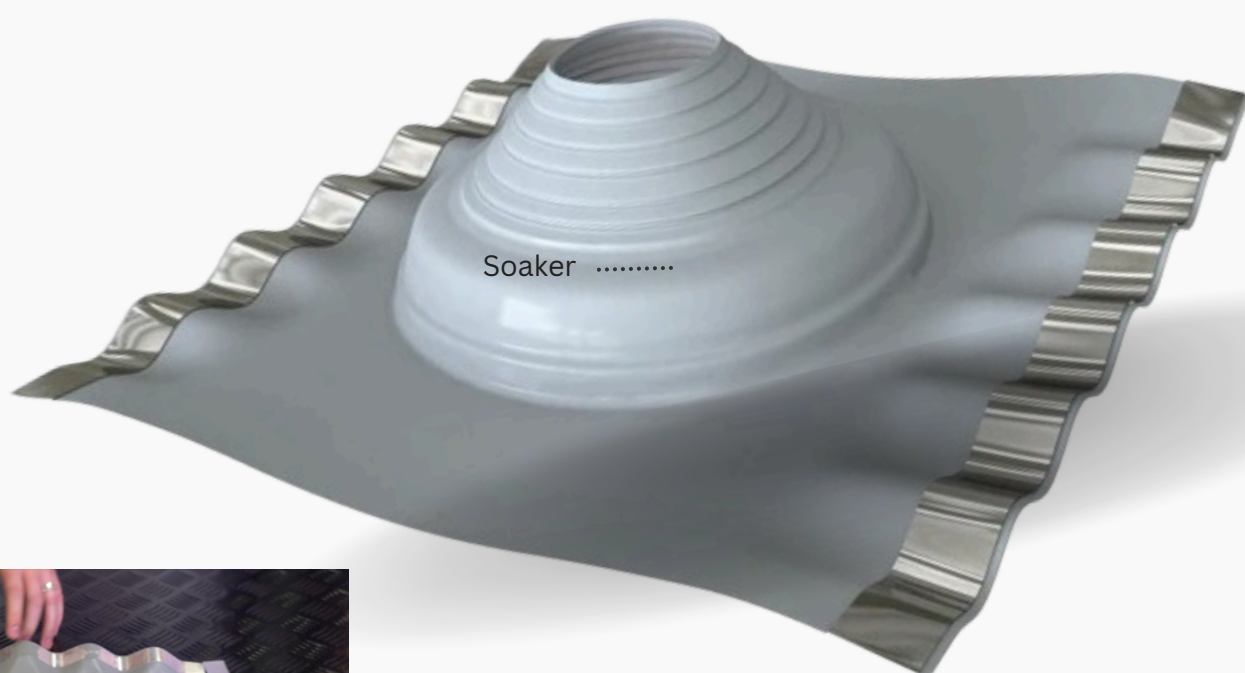


Specifically designed for use on high and low roof pitches

Suitable for use on a roof pitch between 0° and 60° and is easy to install. There's no need to cut around the pipes, just quick straight lines for the square base. It can be used with standard pipes where heat is not an issue, with constant pipe temperatures up to 115°C and intermittent temperatures up to 150°C.



Dektite Retrofit Flashings allow for easy, watertight flashings around existing or hard to reach pipes.

Designed with built in crimps, Dektite Retrofits wrap around pipes without the need for loose clips and rivets.

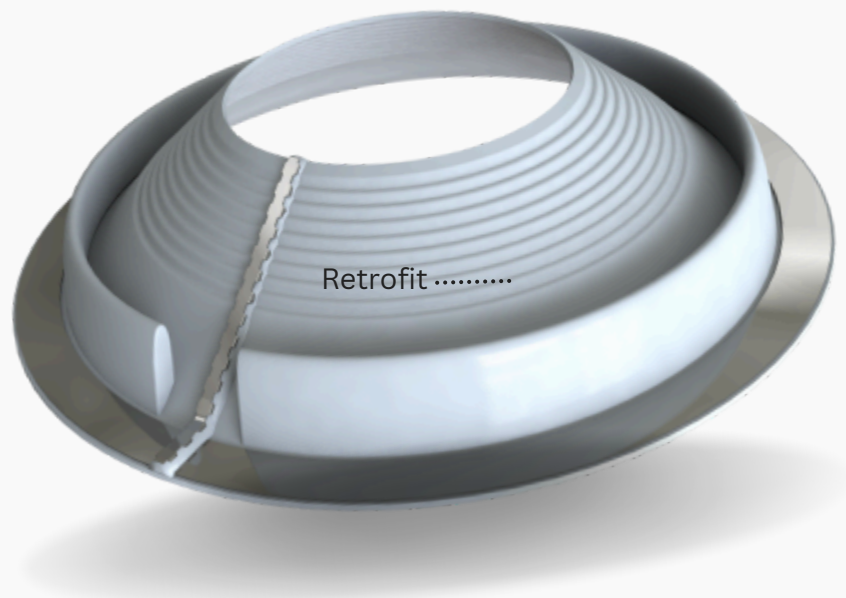

This Dekstrip Pipe and Chimney Flashing Grey TPE is an incredibly versatile, expandable, lead-free flashing solution

It offers varying widths and roll lengths to suit multiple applications and utilises a specially formulated rubber polymer. The unique, patented internal aluminium strip allows the forming of almost any shape to seal and weatherproof.



Used for expansion joints in walls and gutters

Dekstrip is ideal for large round or square penetrations, valleys, chimneys, bull nose roofs and skylights. What's more, you can paint the surface, making it a versatile, elegant roof flashing product for almost any application. Use Dekstrip with butyl mastic sealant and self-drilling screws to seal pipes, ducts, skylights, chimneys, and different roofing profiles.



#1 (Pipe OD 1/4" - 2 1/4")



#2 (Pipe OD 1/4" - 3")



#3 (Pipe OD 1/4" - 5")



#4 (Pipe OD 3" - 7")



#5 (Pipe OD 4" - 8")



#6 (Pipe OD 5" - 9")



#7 (Pipe OD 6" - 12")



#8 (Pipe OD 7" - 14")



#9 (Pipe OD 9" - 20")